

**The Ventilation
Specialist**



Electrifying lifestyle !



**UNFOLD
ENERGY SAVING
VENTILATION SOLUTION
2024 - 2025**

CE | CB

REXTON, which originated in UAE in the Early 1990, is today a major player in cutting-edge technology-driven industries like LED lighting, Cable Management Systems, Lifestyle & Security, High end energy efficient Industrial Air Movement, Heating & Ventilation, Personal care, Emergency lighting and Data storage with an extensive range of over 5000 products sold and serviced across 120 countries globally, and is the member of international business venture of Kingston Holdings FZC, the Saif Zone, Sharjah UAE based diversified industrial Group.

The SAIF ZONE Facility is spread over 10,00,000 Sq.ft. land area; 2,25,000 Sq.ft. of most modern Logistics and Distribution Facility; 1,25,000 Sq.ft. of manufacturing area; 2,00,000 Sq.ft. of most modern Office Facility.


Spread across huge manufacturing facilities, Rexton has a most modern infrastructure setup including machines from international brands for all areas of manufacturing, and integrated inhouse capabilities for achieving the required finish, specifications and output needed to manufacture high quality products.

The manufacturing plants are certified to ISO 9001, ISO 14001, and ISO 18001 where all products of REXTON are made to highest international standards CE ,CB , BS EN and ISO quality standards to ensure durability and accuracy for their intended application. We use the highest quality of selected raw materials, and by executing the complete manufacturing process from planning to delivery with our specially appointed teams, we ensure quality at every stage of every product we manufacture.

CORPORATE HEAD QUARTERS, SHARJAH, UAE



ELITE SERIES...

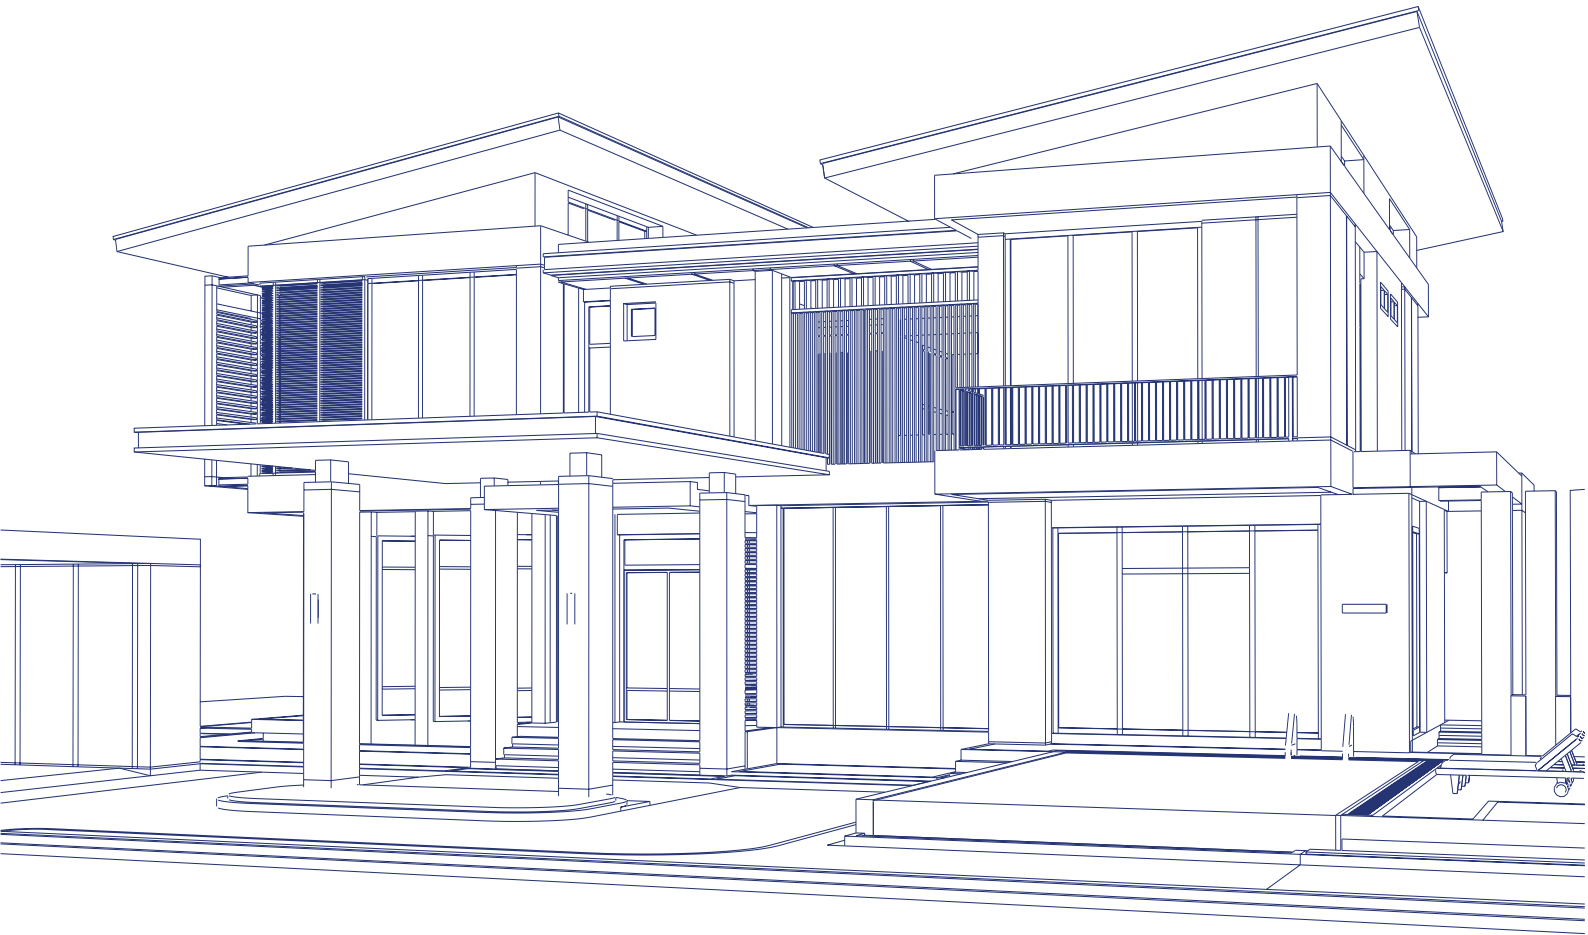

Innovation in Ventilation

Product Features At A Glance



Silent

Near-silent running minimises disturbance.




Simple Installation

A range of smart and innovative features enables a quick, simple and hassle-free installation.



Simple Maintenance

Fans require minimal maintenance once installed.



Long Ducting

Indicates that we can use the product for Long Ducting



CE

All our products are CE approved.



Speed Options

Adjustable Speed Options



CB

All our products are CB approved.



Elite Design

Indicates that a product has innovative design features.



Warranty

2 Year Warranty




Sensor

Motion Sensor



Easy Clean


Easy removal front for cleaning




Motor

Ball Bearing Motor


NOTE : Inside the Catalogue, Images may differ in appearance from the Actual Product

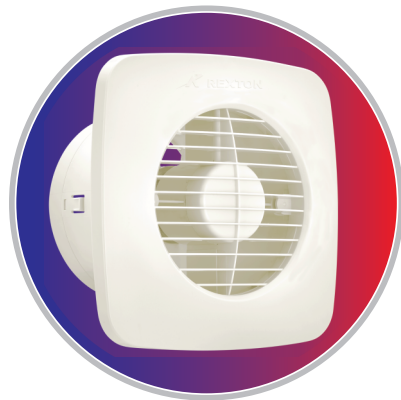


DXR - 150S

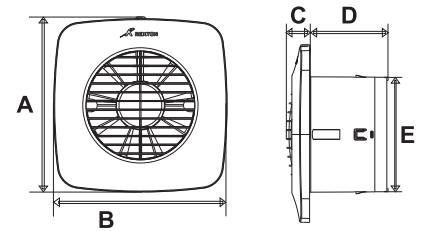

Product Code	Dimension(mm) A/B/C/D/E	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
RX20277-6	232/229/30/101/149	25	2100/2350	346/396	33/37	150	20

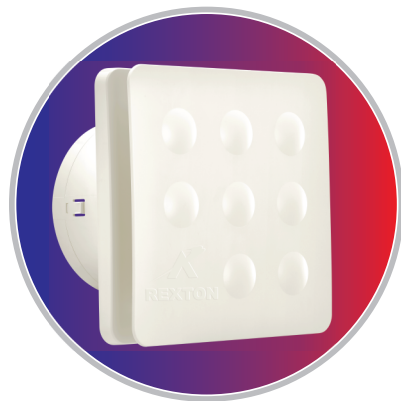


HUMP - 150S

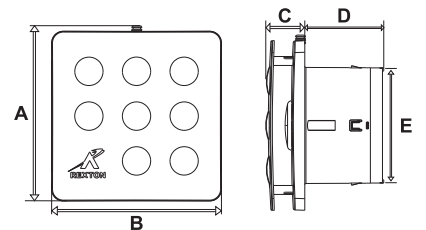


Product Code	Dimension(mm) A/B/C/D/E	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
RX20247-6	222/219/50/101/149	25	2100/2350	346/396	33/37	150	20




GXR - 150W

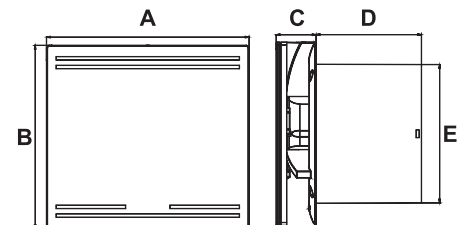

Product Code	Dimension(mm) A/B/C/D/E	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
RX20281W-6	211/191/42/109/144	25	2250	325	37	150	12

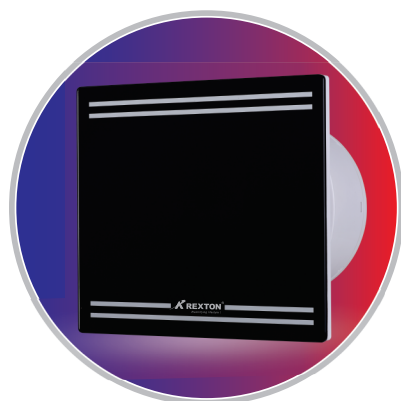


GXR - 150B

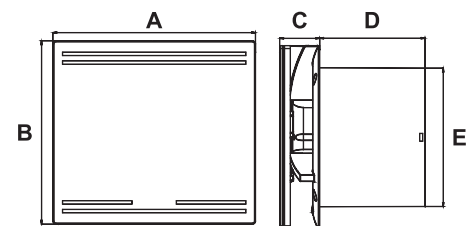


Product Code	Dimension(mm) A/B/C/D/E	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
RX20281B-6	211/191/42/109/144	25	2250	325	37	150	12




CURVE - 150S

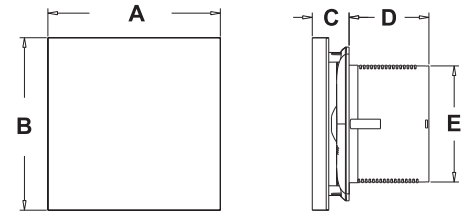

Product Code	Dimension(mm) A/B/C/D/E	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
RX20282W-6	216/216/46/100/145	25	2250	325	37	150	20

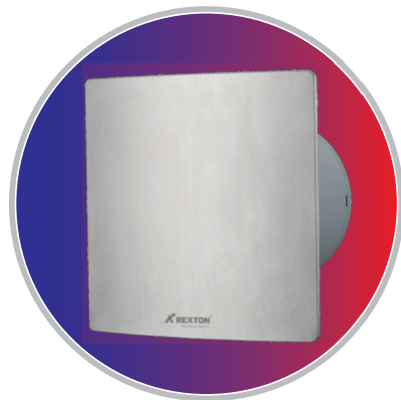

CURVE - 150S (I)

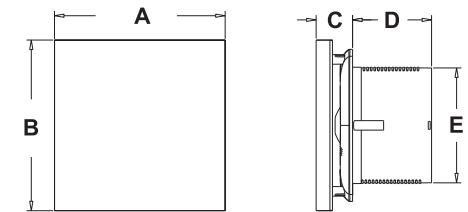


Product Code	Dimension(mm) A/B/C/D/E	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
RX20282I-6	216/216/46/100/145	25	2250	325	37	150	20




ARCH - 150S

Available in Motion Sensor Also

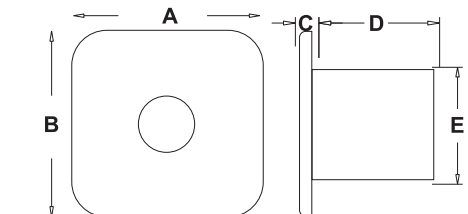


Product Code	Dimension(mm) A/B/C/D/E	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
RX20279-6	193/193/34/120/145	25	2250	335	37	150	20

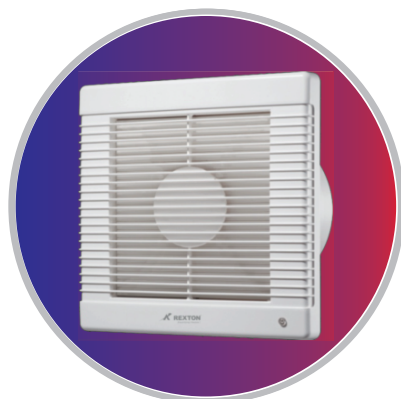

SLIM - 150S


Auto Shutter

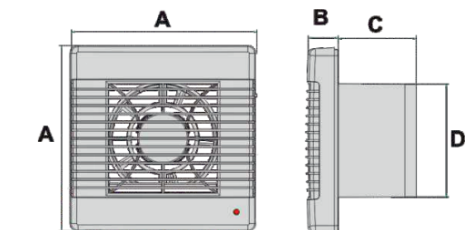


Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
RX20286-6	211/26/99/148	25	2250	335	37	150	20




XIDPR - 150

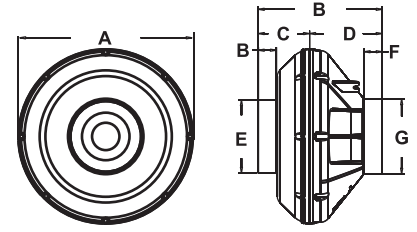


Product Code	Dimension(mm) A/B/C/D/E/F/G	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
RX20283G-6	346/246/102/144/145/36/149	110	2650	718	41	150	4

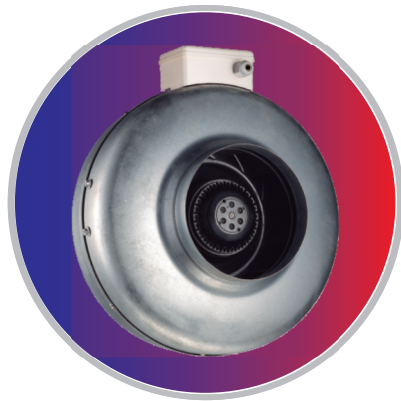


XIDR - 200/315




Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
RX20284-8	25/200/223/333	138	2580	830	44	200	4
RX20284-12	25/315/258/402	215	2390	1885	52	315	2

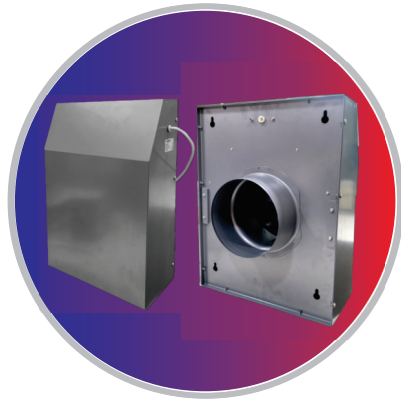


SHARP - 150

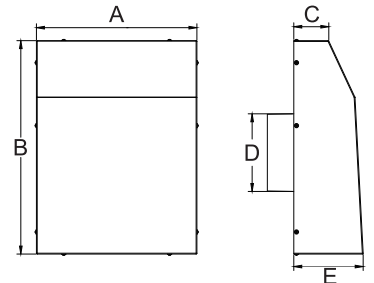

Product Code	Dimension(mm) A/B/C/D/E	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
RX20285-6	303/403/66/147/131	110	2650	712	43	150	1

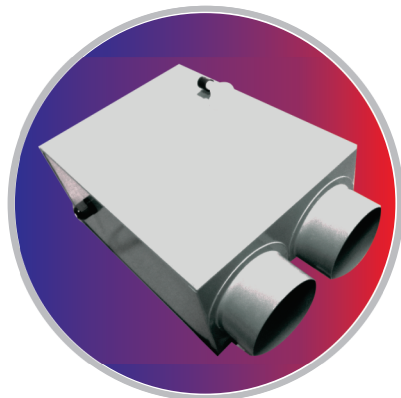

RHRS - 250

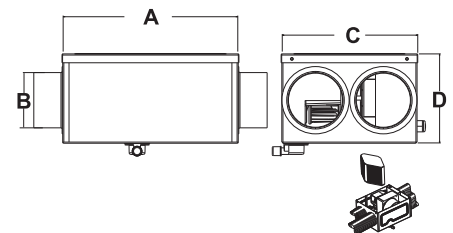

Product Code	Dimension(mm) A/B/C/D	Watts	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
Rx20280	450/145/415/255	80/120	550/650	40/43	150	1

SWING - 48

Descriptions :



- 70° oscillation
- 3 speed settings(low/mid/high)
- Style:3 model swing(normal/natural/sleep)
- With Remote Control
- Timer:1 hour to 15 hour timer setting
- LED Display:show all functions and room temperature
- In built -ve IONIZER

SPECIFICATIONS

Model	Rated Voltage [V]	Power [W]	NOISE LEVEL [DB]	RPM [R/Min]	Weight [KG]	Size [inches]
RTF 48	220-240/50	45/55/65	33/36/40	1000/1150/1350	3.8	48

DIMENSION(mm)

Model	A	B	C	D
RTF 48	1200	300*300	50	600

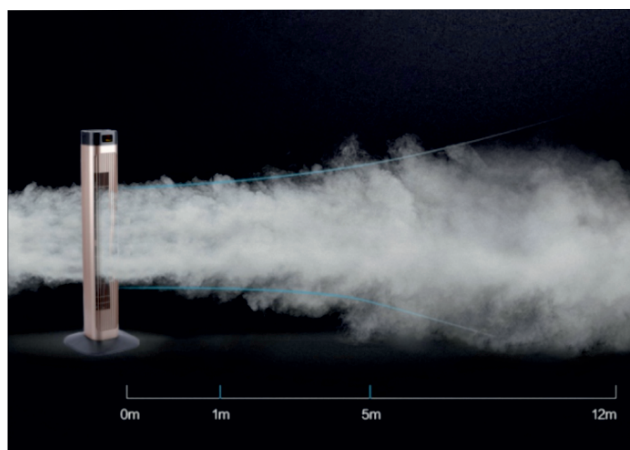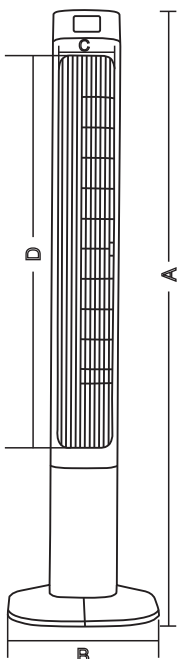

TOWER FAN


Notes






REXTON®
Electrifying lifestyle !

Designer Series...

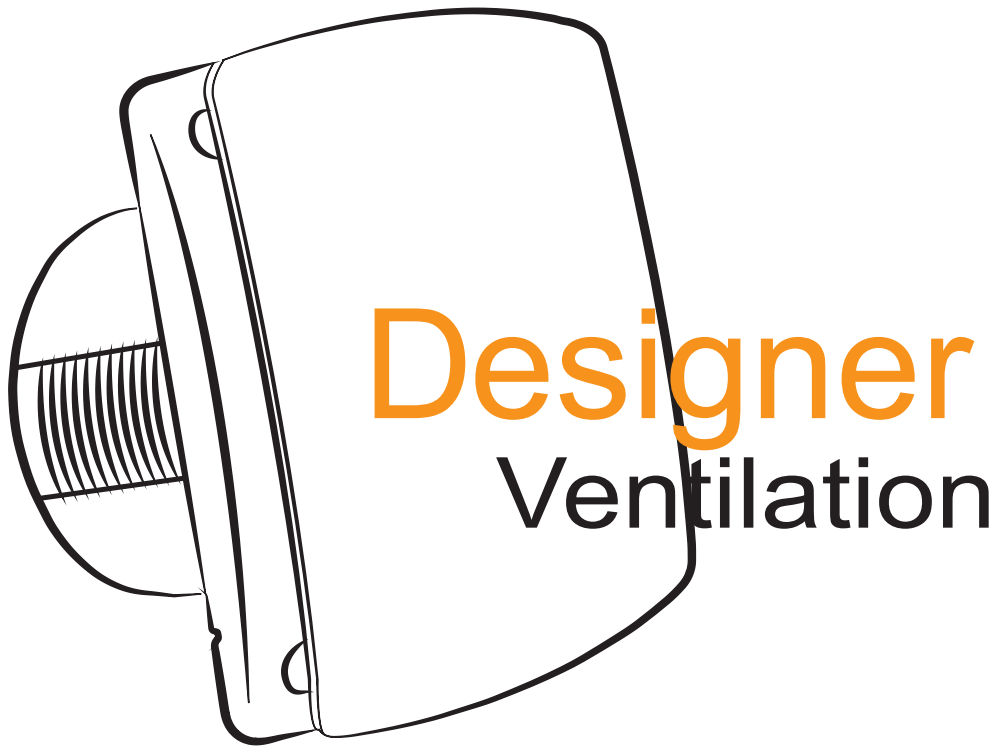




PEARL (W) - 4/5/6/8

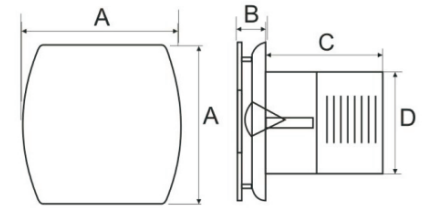

Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R21267-4	150/34/86/94	15	2600	95	33	100	20
R21267-5	170/32/100/116	20	2350	190	35	120	20
R21267-6	193/33/105/145	25	2250	325	37	150	20
R21267-8	260/44/134/195	25	1700	435	39	200	8




PEARL (I) - 4/6

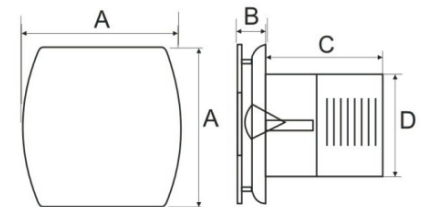

Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R21277-4	150/34/86/94	15	2600	95	33	100	20
R21277-6	193/33/105/145	25	2250	325	37	150	20




AURA (W) - 6

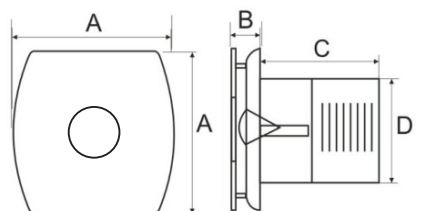

Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R2126T7-6	193/33/105/145	25	2250	335	37	150	20




AURA (I) - 6

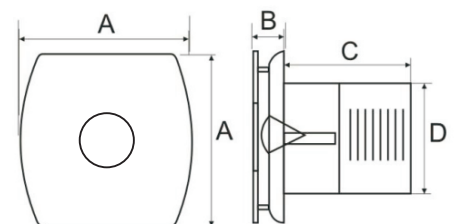


Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R212T7A-6	193/33/105/145	25	2250	335	37	150	20

GRID - 4/6/8

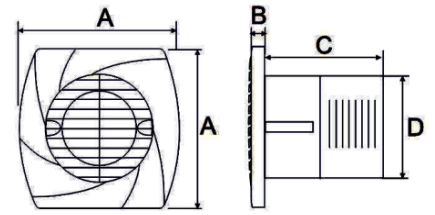


Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R21257-4	140/11/88/98	15	2600	102	33	100	20
R21257-6	190/15/112/148	25	2250	335	37	150	20
R21257-8	257/08/129/196	25	1800	495	39	200	8

MOON (W) - 4/6

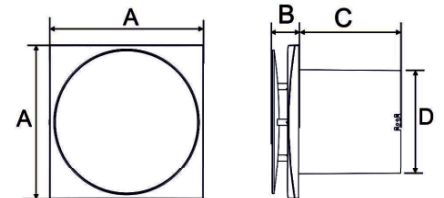


Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R21307-4	150/24/100/98	15	2550	92	33	100	20
R21307-6	204/29/120/143	25	2150	315	37	150	20

SKY - 4

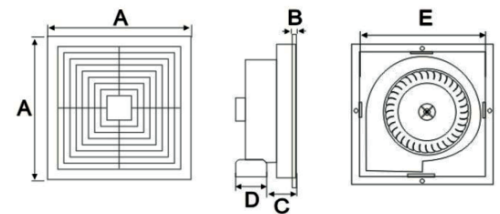

Product Code	Dimension(mm) A/B/C/D/E	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R21317-4	270/10/35/98/228	35	1750	220	38	100	8


ECO - 6

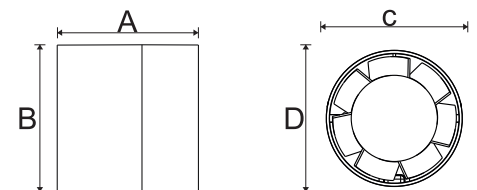

Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R21327-6	135/145/145/145	25	2000	295	40	150	20



Grand Inline Ventilation 4/6

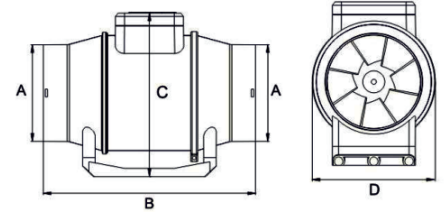

Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R212AP7-4	97/305/218/193	25/30	2350/2550	198/278	30/34	100	8
R212AP7-6	145/402/251/227	60/80	1950/2500	428/598	39/44	150	6



ACCESSORIES



Gravity Grille - 6"

Grille - Fresh ABS Plastic
Uv Protected



Fixed wall Grille - 4" , 6" & 8"

Grille - Fresh ABS Plastic
Uv Protected



CAV - 4", 5" & 6"

Air Valve - Fresh ABS Plastic
UV Protected



Round Fixed Wall Grille - 6"

Grille - Fresh ABS Plastic
Uv Protected




Fixed Grille (Metal) MG 8" & 10"

Grille With Mesh
(Mosquito Protection)



Bull Nose Grille - 6"

Grille - SS304



Coweled Grille - 4"

Grille - Fresh ABS Plastic
Uv Protected




علامة الجودة الإماراتية
Emirates Quality Mark

Notes




Air Movement Series...

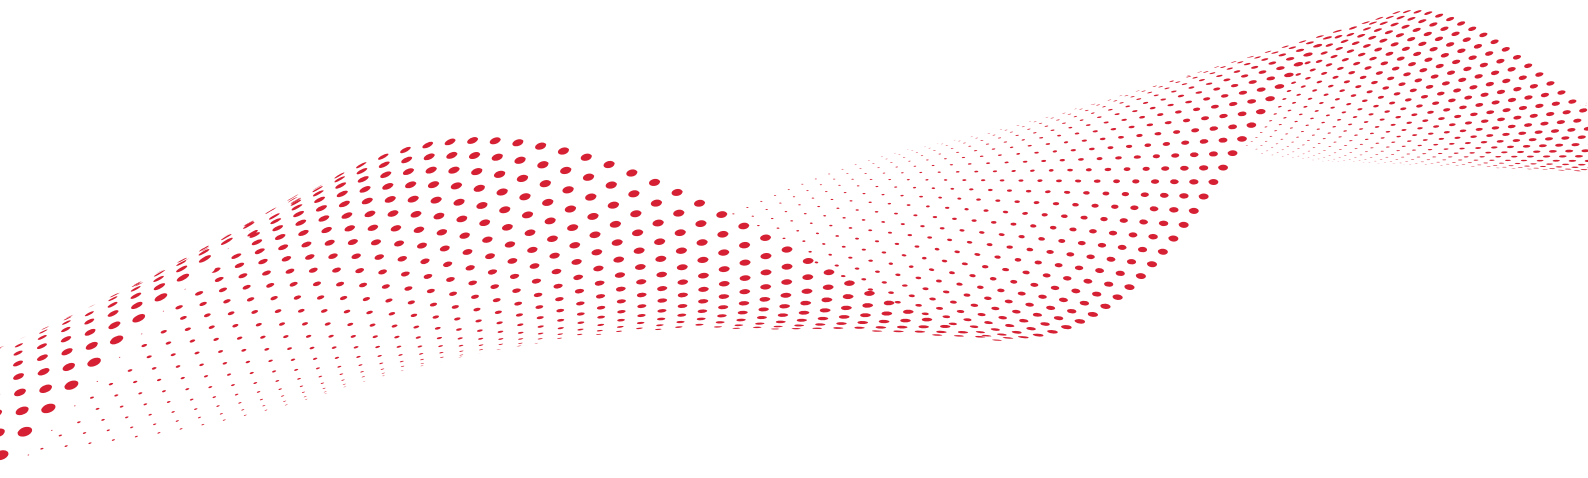




GALAXY (W) - 4/6

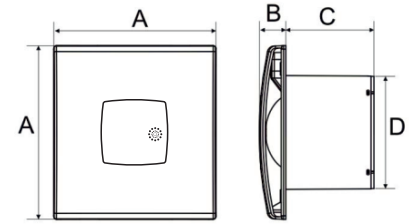

Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R21297-4	150/21/72/98	15	2550	98	33	100	20
R21297-6	200/25/93/148	25	2150	325	37	150	20




GALAXY (B) - 4/6

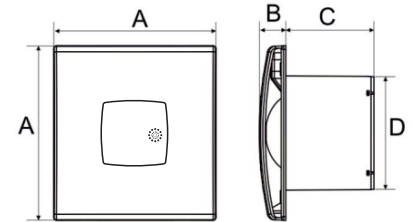

Product Code	Dimension(mm) A/B/C/D	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R21297-4	150/21/72/98	15	2550	98	33	100	20
R21297-6	200/25/93/148	25	2150	325	37	150	20




Storm - 8/10

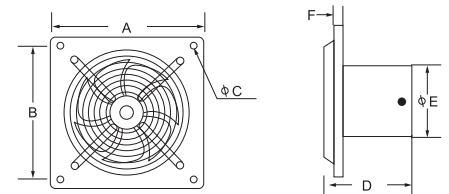

Product Code	Dimension(mm) A/B/C/D/E/F	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R290108	250/215/6/150/200/9.5	80	2800	1320	60	200	8
R2901010	316/262/12/165/250/10	100	2800	2140	64	250	6





Windy - 6

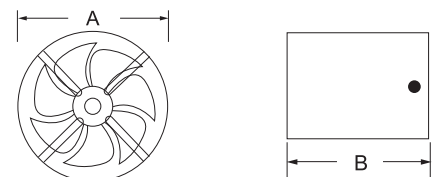


Product Code	Dimension(mm) A/B	Watts	RPM	Air Flow (m3/hr)	Noise level (db)	Outlet (mm)	Master Packaging (Nos.)
R291106	150/195	40	2850	780	55	147	16

20" Wall Air Circulator



Mounting plate

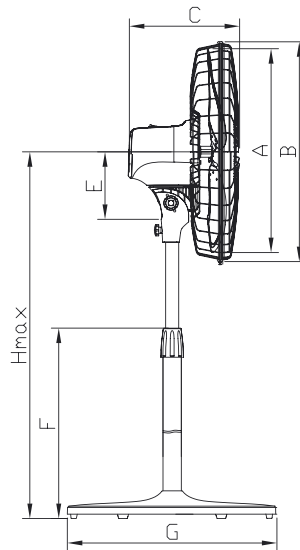

20" Stand Air Circulator



RAS 20 HD


DIMENSION (mm)

Model	A	B	C	D	E	F	G	H
RAW 20 HD	500	565	290	174	-	-	-	-
RAS 20 HD	500	565	290	-	155	640	480	1200

CE | CB

Model	Blades	Voltage (V)	Air Delivery (cmm)	Power (W)	Speed (rpm)	Air Volume m3/Hr	Noise (db (A))
RAW20 HD	3 blade, Aluminum	220-240/50	142	135	1350	8500	58
RAS 20 HD		220-240/50	142	135	1350	8500	58

26" MISTING AIR CIRCULATOR

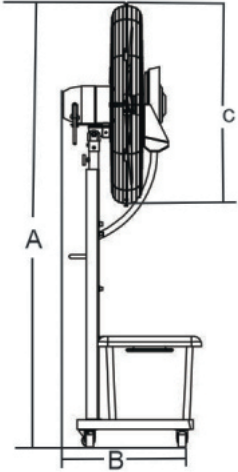

DIMENSION (mm)

Model	A	B	C
RMFS 26	1730	470	710

DESCRIPTION

Motor	100% Copper, cast iron motor housing
Power(W)	200W +-10%
Voltage	220V - 240V / 50Hz
Speed	3 Speed option 1300~1400 RPM
Nets	2.0mm wire dia, 8mm wire space, clip type fastened grill, black powder coated
Blade	3 Aluminium blades
Pipe	Fix pipe, thickness:1.0mm
Base	Iron base, 40L Black water tank
Power cord	3*0.75mm *1.8m
Plug	BS plug



Certificate approved aviation plug



Pure Copper Motor



Strong mist sprayer



Wheels with brake



Mist & Fan Function



Pump with CE & CB Certificate

INDIA

REXTON TECHNOLOGIES INDIA

SCF 40, Sector-19

Faridabad (Haryana) - 121002

Ph.: 0129-4890461, 9599385152

E-mail : rextontechnologiesindia@gmail.com

Web : www.rextontechnologies.in

 : [rexton_technologies_](https://www.instagram.com/rexton_technologies_)

 : Rexton Technologies India



www.rextontechnologies.in

UAE

Rexton Technologies UAE

M-4-17/18, Saif Zone, P.O. Box : 8080
Sharjah, UAE

UK

Rexton Technologies UK

Unit II Broadgate House, Westlode Street
Spalding, Lincs, PE 11 2AF, London, UK

USA

Rexton Technologies USA

4607, Sundown Court Missouri
City Houston Texas 77459 USA